

Second Stage Regulators for 2 PSI Systems LV4403Y and LV5503Y Series

Application

Designed to reduce first stage pressure of 10 PSIG down to 2 PSIG. A line pressure regulator is required downstream to reduce the 2 PSIG to a nominal 11" w.c.

Features

- Large vent helps prevent blockage and has 3/4" F.NPT for vent piping.
- With 15 PSIG inlet pressure, regulator is designed to not pass more than 5 PSIG with the seat disc removed.
- Incorporates an integral relief valve.
- Replaceable valve orifice and valve seat disc.
- Straight line valve closure reduces wear on seat disc.
- Unique bonnet vent profile minimizes vent freeze over when properly installed.
- Large molded diaphragm is extra sensitive to pressure changes.
- Built in pressure tap has plugged 1/8" F.NPT outlet. Plug can be removed with a 3/16" hex allen wrench.
- Select blue finish.

*Backmount Design

Mounts directly to house line piping. Eliminates need for union joints, elbows, and mounting brackets. Quick and easy to install.

Materials


Body (LV4403Y Series)	Die Cast Zinc
Body (LV5503Y Series)	Die Cast Aluminum
Bonnet (LV4403Y Series)	Die Cast Zinc
Bonnet (LV5503Y Series)	Die Cast Aluminum
Nozzle Orifice	Brass
Spring	Steel
Valve Seat Disc	Resilient Rubber
Diaphragm	Integrated Fabric and Synthetic Rubber




LV4403Y Series

LV5503Y Series


LV4403Y4, LV4403Y46R

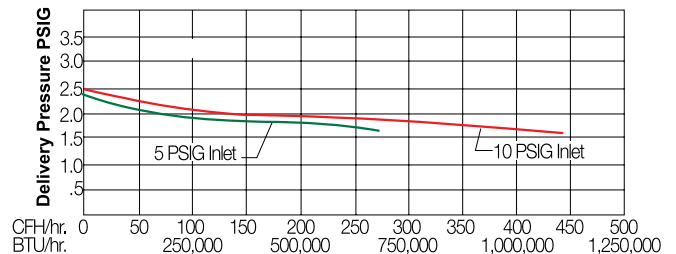

LV5503Y6

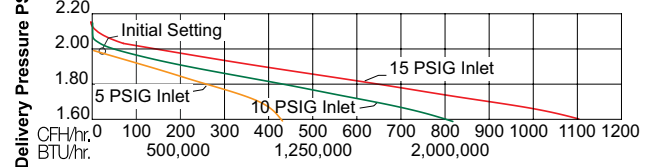

LV5503Y8

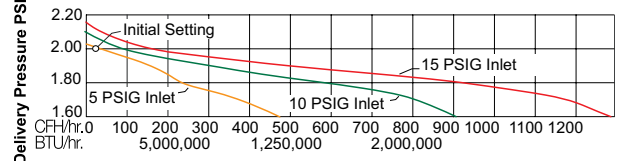

Ordering Information

Part Number	Inlet Connection	Outlet Connection	Orifice Size	Adjustment Range	Bonnet Vent Position	Vapor Capacity BTU/hr. Propane***
LV4403Y4	1/2" F. NPT	1/2" F. NPT	1/4"	2 PSIG @ 10 PSIG Inlet	Over Inlet	1,000,000
LV4403Y46R*		3/4" F. NPT				
LV4403Y66R	3/4" F. NPT	3/4" F. NPT				2,200,000
LV5503Y6		1" F. NPT				
LV5503Y8	3/4" F. NPT	1" F. NPT	9/32"			

Maximum flow is based on 10 PSIG inlet pressure and 1.5 PSIG delivery pressure.